

Specification Datasheet

Logi-CHROM


Manual Injector Valve

The Logi-CHROM manual injection valve provides an efficient and reliable manual injection function. It mounts on the pump module to save both bench space and offers a convenient operating height.

Options are available for handling operating pressures up to 1200 bar.

Features

- Options up to 1200 bar operating pressure.
- Mounted on the instrument to save bench space.
- Steel or PEEK wetted components options available.

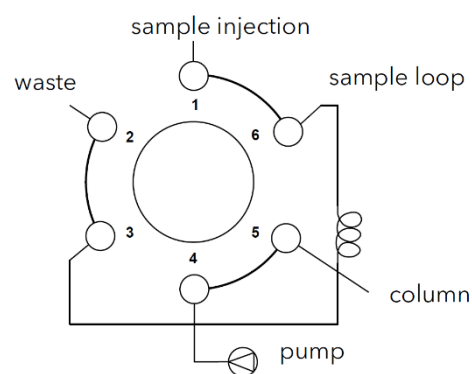

Ordering Options

Part Number	Item
DL-241-09	Logi-CHROM Manual 6 Port 2 Position Valve. 1200 bar max pressure.
DL-241-12	Mounting Bracket for Logi-CHROM Manual Injection Valve.
DL-241-42	Injection syringe 50 µl
DL-241-40	Injection syringe 100 µl
DL-241-41	Injection syringe 1000 µl
DL-241-11	Sample loop 100 µl PEEK
DL-241-10	Sample loop 100 µl stainless steel.
DL-241-39	Sample loop 20 µl stainless steel.
DL-241-43	Sample loop, 1000 µl, stainless steel.

Europe & Worldwide

LabLogic Systems Limited

Paradigm House, 3 Melbourne Avenue
Broomhill, Sheffield, S10 2QJ, UK

E-mail: solutions@lablogic.com

Tel: +44 (0)114 266 7267

Fax: +44 (0)114 266 3944

www.lablogic.com



Certificate No: 1535
ISO 9001



USA & Canada

LabLogic Systems, Inc.

1911 N US HWY 301, Suite 140
Tampa, FL 33619, USA

E-mail: solutions@lablogic.com

Tel: +1-813-626-6848

Fax: +1-813-620-3708

www.lablogic.com



Certificate No: 10926
ISO 9001

